

SWISSMA SNAPWELT ROOFING SYSTEM



Swissma
BUILDING TECHNOLOGIES SDN. BHD.

- Up to 25 years warranty for Zinalume® steel and COLORBOND® steel material
- Sleek and cost efficient
- Modern solution for residential and commercial building roof
- Quick and easy installation
- Concealed fix, no puncture
- Can be customised to meet any thermal and acoustic requirement

member of :




malaysiaGBC

Colorbond®



www.swissma.com

SWISSMA SNAPWELT ROOFING SYSTEM

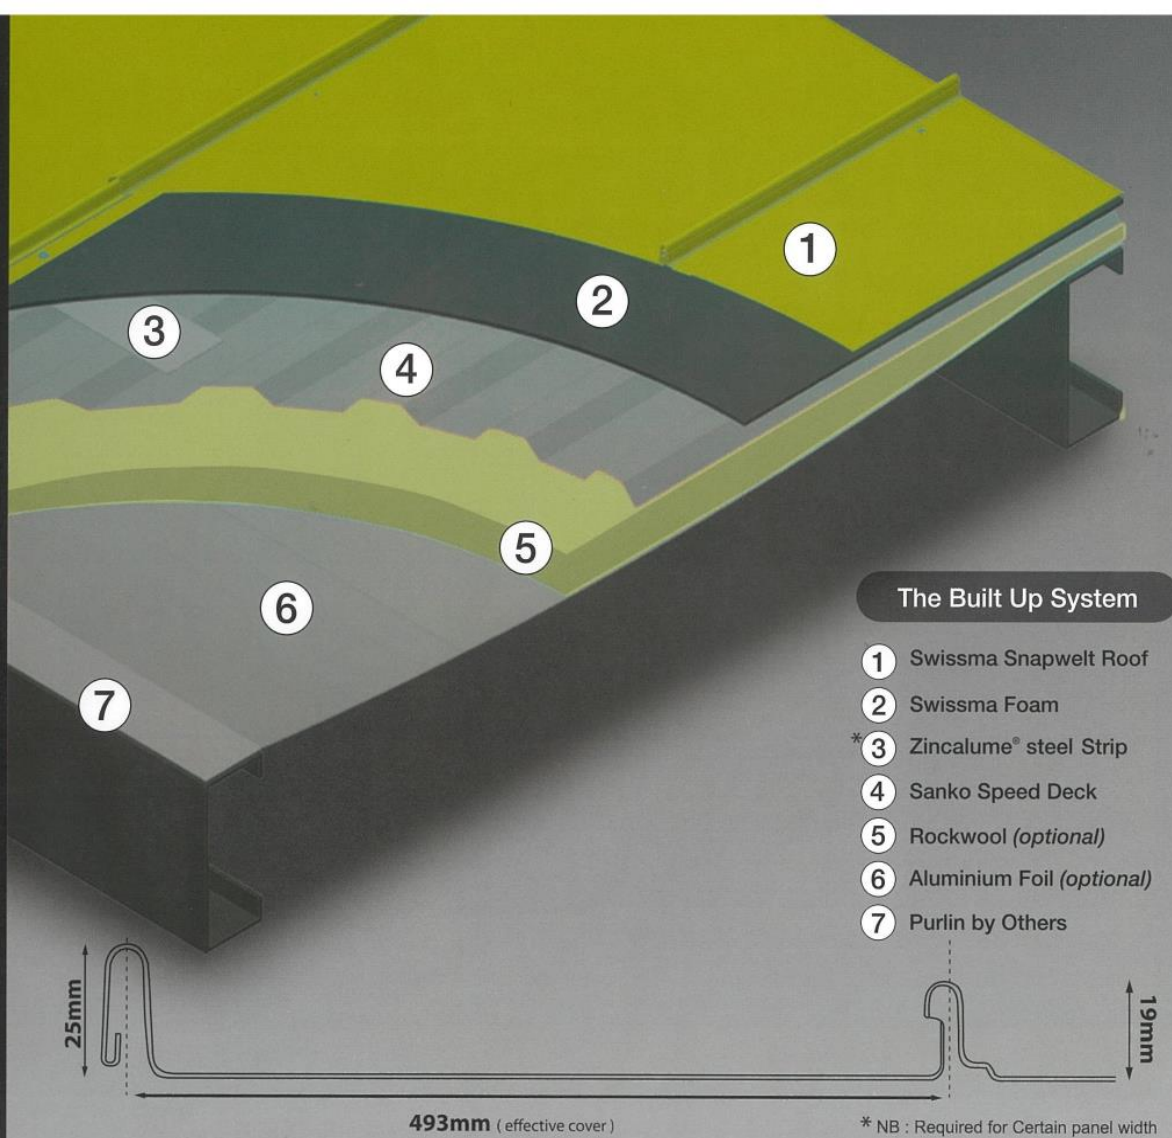

The Built Up System

- 1 Swissma Snapwelt Roof
- 2 Swissma Foam
- * 3 Zinalume® steel Strip
- 4 Sanko Speed Deck
- 5 Rockwool (optional)
- 6 Aluminium Foil (optional)
- 7 Purlin by Others

Specification

Material	Zinalume® steel COLORBOND® steel PRIMAMAJU-R™ steel
Thickness	0.42mm BST*
Effective Width	493mm (25mm HT) *standard 425mm (38mm HT)
Rib height	25mm
Shape	Straight panels only
Support Spacing	1200mm (recommended)
Application	Roof and wall cladding
Minimum Pitch	3° (recommended)
Maximum Length	To be advised depending on the pitch



For enquiries, please contact:
Swissma Building Technologies Sdn Bhd (444319-T)
 Jalan Utas (15/7), Shah Alam Industrial Estate
 P. O. Box 7053, 40700 Shah Alam
 Selangor Darul Ehsan, Malaysia
Tel : (006) 03 5519 1360
Fax : (006) 03 5510 1362
Email : enquiry@swissma.com
www.swissma.com

Distributed by :

