


# SWISSMA ZIPWELT STANDING SEAM


Colorbond®



**Swissma**  
BUILDING TECHNOLOGIES SDN. BHD.

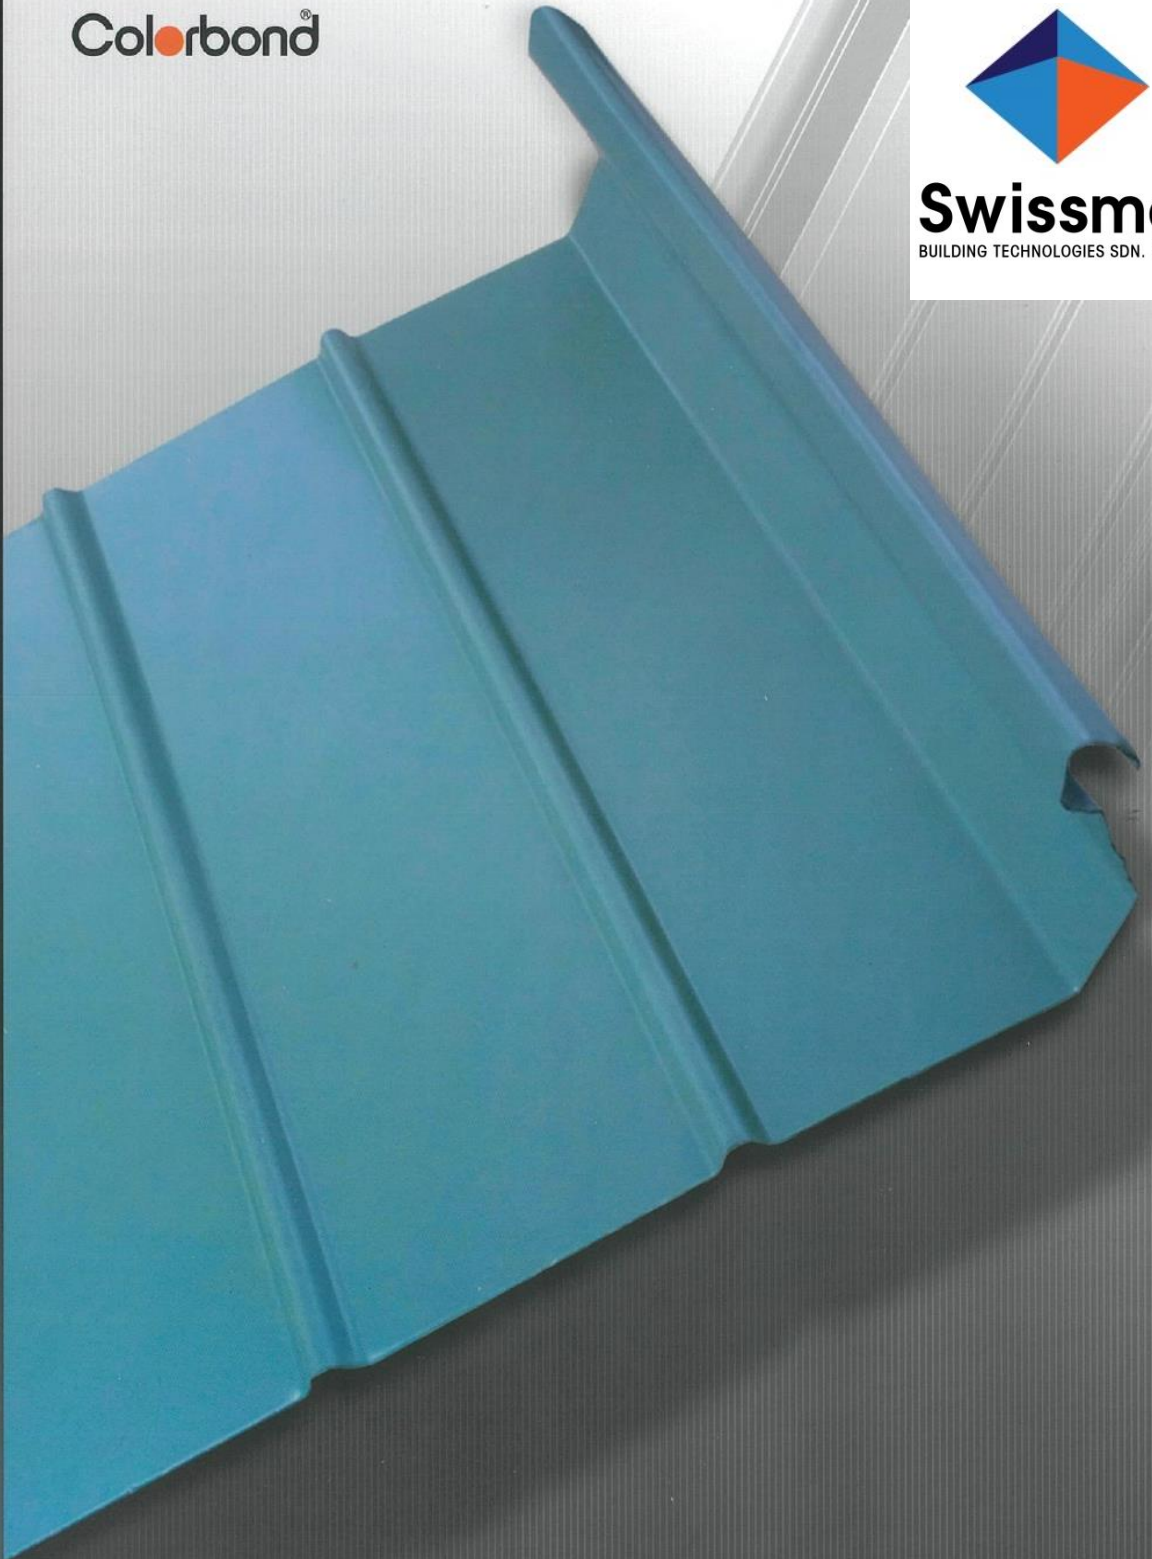

# STANDING SEAM SWISSMA ZIPWELT

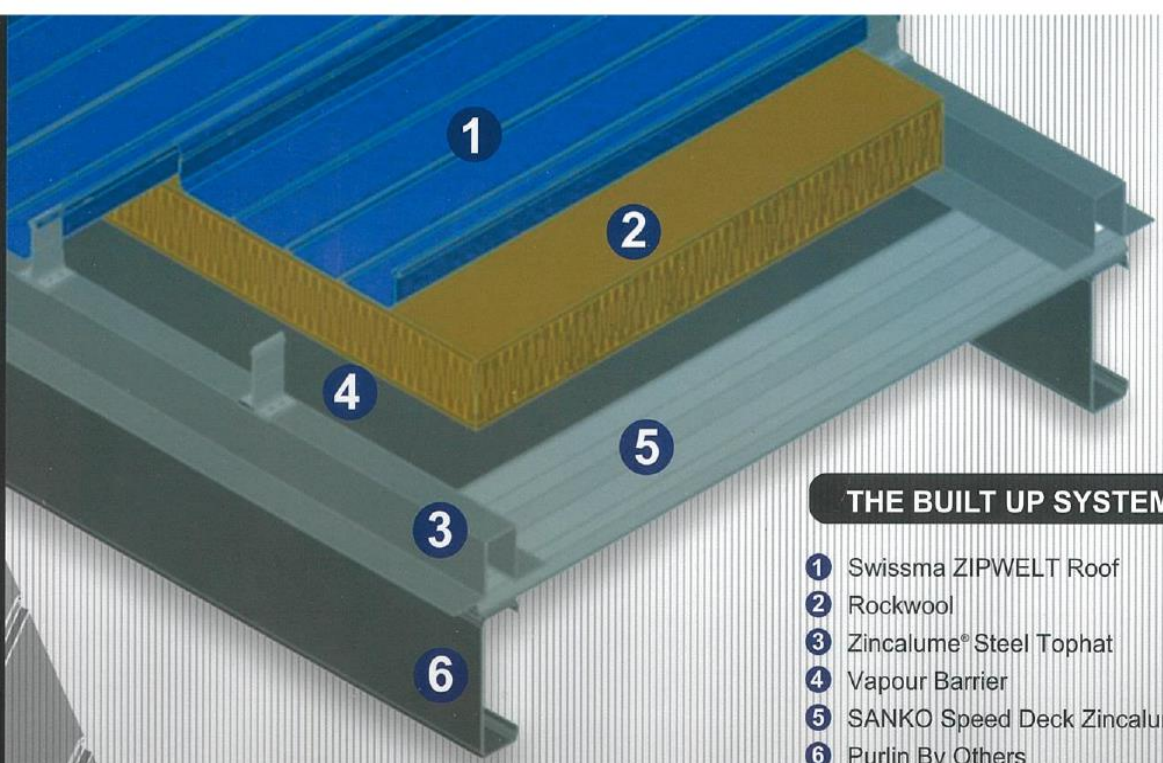

## THE BUILT UP SYSTEM

- 1 Swissma ZIPWELT Roof
- 2 Rockwool
- 3 Zincalume® Steel Tophat
- 4 Vapour Barrier
- 5 SANKO Speed Deck Zincalume
- 6 Purlin By Others



## SELF - WEIGHT

MATERIAL	BASE METAL THICK	WEIGHT (kg/m <sup>2</sup> )
Steel	0.48	5.37
	0.55	6.15
	0.60	6.71
Aluminium	0.90	3.97
	1.20	5.29

## RECOMMENDED MAXIMUM LOAD (KN/m<sup>2</sup>)

MATERIAL	BASE METAL THICKNESS (mm)	SPAN (m)							
		1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50
Steel	0.48	1.80	1.59	1.46	1.36	1.25	1.15	1.10	1.07
	0.55	2.05	1.80	1.62	1.50	1.38	1.27	1.20	1.15
	0.60	2.26	1.98	1.82	1.65	1.55	1.40	1.30	1.30
Aluminium	0.90	2.35	2.05	1.85	1.67	1.54	1.52	1.47	1.42
	1.20	3.15	2.75	2.50	2.20	2.08	2.05	1.95	1.90

NB: The above maximum loads are based on L/200



Swissma Building Technologies Sdn Bhd  
Jalan Utas (15/7),  
Shah Alam Industrial Estate,  
P.O. Box 7053,  
40700 Shah Alam,  
Tel: 603-5519 1360 Fax: 603-5510 1362  
E-mail: [enquiry@swissma.com](mailto:enquiry@swissma.com)  
[www.swissma.com](http://www.swissma.com)

**Colorbond**<sup>®</sup>

